



MOBILITY & IT

MEDICAL

MEDICAL FIXTURES


FIXED VESA TERMINATION ARM FOR SCREEN/PANEL PC AND FOLDABLE KEYBOARD SUPPORT 580X200 MM (TERMINATION Z)



Single pivot arm
Length 240 or 300 mm
224M / 230 M



Adjustable single arm
Length 450 mm
431M

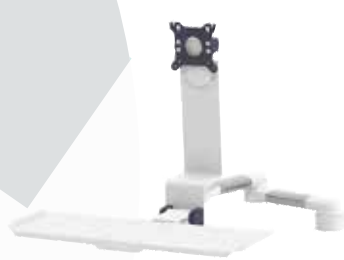

Double pivot arm
Length 2 x 300 mm
H33030m



Double adjustable arm
Pivot length 250 mm and
adjustable length 450 mm
73130M

VESA TERMINATION ARM FOR PANEL PC SCREEN



Single pivot arm
Length 240 or 300 mm
224G - 230G



Adjustable single arm
Length 450 mm
431G



Double pivot arm
Length 2 x 300 mm
33030G - Light applications
H33030G - Heavy-duty applications



Double adjustable arm
Pivot length 250 mm and
adjustable length 450 mm
73130G

IT-LIFT WALL COLUMN



TECHNICAL SPECIFICATIONS

- Material in aluminum coated with RAL 9016 powder.
- Smooth surface for easy disinfection.
- Cables integrated into the column.
- Quick release VESA 75/100 support.
- Adjustable work surface up to 328 mm.
- Zero maintenance and 5-year warranty.
- Keyboard mouse support, magnetic, dimensions 580 x 200 mm.
- The keyboard support is retractable for space saving (distance of 100 mm from the wall when folded).
- When unfolded, the keyboard support is 490mm from the wall.
- Easy and simple assembly.
- Zero maintenance and 5-year warranty.

PANEL PCS

PANEL PCS WITH INTERNAL POWER SUPPLY



POC 621 - 21.5" / 624 - 23.8"
11th generation - NVME SSD 7 times faster

TECHNICAL SPECIFICATIONS

- Integrated power supply in the panel PC.
- No ventilation.
- Dust and liquid splash resistance: IP 65 front and IP54 rear.
- Touchscreen, capacitive, and usable with gloves.
- Image zoom and rotation possible.
- Flat, without roughness for total and fast disinfection.
- Compliant with EN6061-1-2 standard.
- Rich and protected connectivity.
- Full HD resolution, 1920 x 1080.
- Available with Intel Core i5 or i7 processor.
- NVME SSD hard drive.
- Warranty: 3 years with extension to 4 or 5 years.

MONITORS

Alternative to the Panel PC, the medical monitor requires connection to a central processing unit. Ideal for endoscopy, radiography, and CT scans.

TECHNICAL SPECIFICATIONS

- Dust and liquid splash resistance IP54 front and rear.
- Touchscreen workstation usable with gloves.
- Image zoom and rotation possible.
- Flat, without roughness for total and fast disinfection.
- Compliant with EN6061-1-2 standard.
- Rich connectivity and front control buttons.
- 2 resolutions:
Full HD, 1920 x 1080 for PAX 121 and 124.
4K UHD, 3810 x 2160 for PAX 327 and 332.
- Warranty: 2 years with extension to 3 or 4 years
- Touchscreen workstation usable with gloves optional.



PAX-121 - 21,5"



PAX-124 - 23,8"



PAX 327 - 27"
PAX 332 - 32"



KEYBOARDS AND MICE

Medical staff face hygiene and time constraints in disinfecting their workstations. Traditional office equipment is unsuitable due to the relief of the keys, which harbors microbes and makes it difficult to clean between them, and their inability to withstand hydro-alcoholic solutions.

The range of medical keyboards and membrane keyboards for laptops perfectly meets these requirements without compromising typing comfort.

TECHNICAL SPECIFICATIONS


- Ultra-thin keyboard without relief for quick and efficient cleaning.
- Keyboard membrane combining Nano Silver antibacterial system with a hypoallergenic silicone protective barrier.
- Compatible with commonly used disinfectants.
- The membrane is replaceable.
- Wired AZERTY keyboard / USB port.
- Thin and compact keyboard: 400 x 130 x H22 mm.
- Key lifespan: 10 million keystrokes.
- 1-year warranty.



73.001
Mdose antibacterial keyboard without relief
Dimensions: 400 x 130 x H22 mm

TECHNICAL SPECIFICATIONS


- Complete protection against dust and liquid splashes IP68 (submersible).
- Wired AZERTY keyboard with 106 keys.
- Light relief.
- Key locking mode for easy cleaning.
- Excellent tactile feel.
- 100% latex-free silicone membrane.
- USB, PS/2 interface.
- Dimensions: 440 x 138 x H12 mm.
- 1-year warranty.

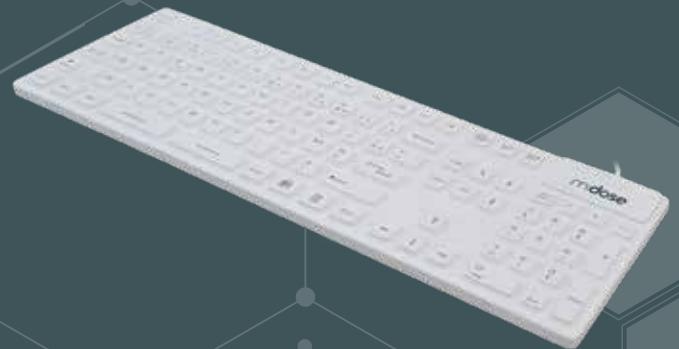

73.003
Mdose IP68 Keyboard
Dimensions: 440 x 138 x H12 mm

TECHNICAL SPECIFICATIONS

- Fully submersible IP68 standard.
- Wired 5-button mouse - Interface: USB.
- Ergonomic design for comfortable use.
- 100% latex-free silicone.
- Resistance to commonly used disinfectants.
- External dimensions: 115 x 65 x H40 mm.

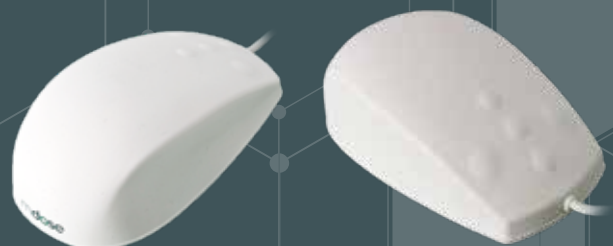

73.004
Mdose IP68 Mouse
Dimensions: 115 x 65 x H40 mm

COMPUTER CARTS

NOVA CART WITH INTEGRATED BATTERY 256 OR 512 WH

TECHNICAL SPECIFICATIONS

- Aluminum structure with powder-coated paint finish.
- Smooth melamine worktop with rounded edges, dimensions 610 x 690 mm.
- Adjustable worktop height between 880 and 1280 mm.
- EN 60601 standard battery available in 256 or 512 Wh.
- Charging time: 3 hours.
- 4 double wheels with a diameter of 70 mm, including 2 front wheels with brakes.
- Weight without options: 37 kg.
- Warranty: 5 years - batteries: 3 years.



NOVA 256SC / NOVA 512SC

JUNO LAPTOP CART

TECHNICAL SPECIFICATIONS

- Aluminum structure with powder-coated paint finish.
- Smooth melamine worktop with rounded edges, dimensions 530 x 580 mm.
- Integrated handle for easy mobility.
- Adjustable worktop height between 825 and 1220 mm.
- Wide base for greater stability and ease of movement.
- 4 double wheels with a diameter of 70 mm, including 2 front wheels with brakes.
- Weight: 12.5 kg.
- Numerous accessories available.
- Delivered unassembled, easy assembly required.
- Warranty: 5 years.



Juno BS with 1 rear secured enclosure
Model: 70.JUNO.01.1100.EU

COMPUTER CARTS

MDLS CART WITHOUT INTEGRATED BATTERY WITH OR WITHOUT KEYBOARD TRAY



MDLS SC
Cart for fixed-arm panel PC and retractable keyboard support



MDLS
Cart for fixed-arm panel PC

TECHNICAL SPECIFICATIONS

- Aluminum structure with powder-coated paint finish.
- Smooth melamine worktop with rounded edges, dimensions 619 x 613 mm.
- Adjustable worktop height between 899 and 1345 mm.
- 4 double wheels with a diameter of 70 mm, including 2 front wheels with brakes.
- Weight without options: 12.5 kg.
- Warranty: 5 years.

COMPLETE CATALOG

UPON REQUEST OR
AVAILABLE FOR DOWN-
LOAD ON OUR WEBSITE



Find us on :



www.mdose.fr

01 45 10 77 90

10 Route de Brie-Comte-Robert - 94520 Périgny-sur-Yerres
Tel: +33 1 45 10 77 90 - Fax: +33 1 45 10 15 95
Email : info@mdose.fr